




SimSpot (PSR) spot filter with pressure-shock resistance of 0.7 bar

SimSpot PSR is available in different executions

- 3 mm galvanized plate - 3 mm stainless steel - 3 mm galvanized plate, powder coated								Dimensions [mm]		
Filter type	Number of bags	Bag length [dm]	Filter- area [m²]	Compress- ed air consump- tion [NI/min]*) **	Weight, without fan [kg]	Weight including fan [kg]		A	B	C
						CPS/R1.5	DCT1			
JM 6/14 PSR	6	14	2,9	35	105	136	151	1060	2137	406
JM 6/19 PSR	6	19	4,0	35	129	160	175	1060	2637	406
JM 6/24 PSR	6	24	5,1	40	162	195	208	1060	3137	406

*) Estimated figures, depending on the type of dust and the filter load (compressed-air quality acc. to ISO 8573 Class 3)

**) According to standard settings on the control for each filter size.

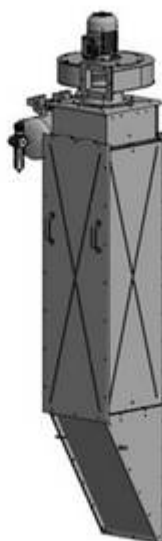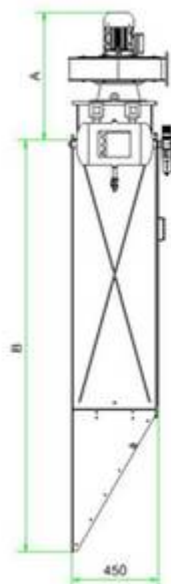

Air

Dust (horizontal)

Dust (vertical)

